



Development of the 2-Component-Injection Moulding for Metal Powders

Ana Paula Cysne Barbosa

Forschungszentrum Jülich GmbH
Institute of Energy and Climate Research (IEK)
Materials Synthesis and Processing (IEK-1)

Development of the 2-Component-Injection Moulding for Metal Powders

Ana Paula Cysne Barbosa

Schriften des Forschungszentrums Jülich
Reihe Energie & Umwelt / Energy & Environment

Band / Volume 127

ISSN 1866-1793


ISBN 978-3-89336-753-5

Index

1	INTRODUCTION AND OBJECTIVES	1
2	THEORETICAL BACKGROUND	5
2.1	POROUS TITANIUM AS IMPLANT MATERIAL	5
2.2	FABRICATION METHODS OF POROUS METALS	8
2.3	METAL INJECTION MOULDING (MIM)	13
2.4	2-COMPONENT-MIM	16
2.5	MIM FEEDSTOCKS	21
2.5.1	<i>Binder systems</i>	21
2.5.2	<i>Debinding methods</i>	28
2.5.3	<i>Solids loading</i>	37
2.5.4	<i>Flowing behaviour and rheology</i>	41
2.6	STATE OF THE ART IN JÜLICH	53
3	OBJECTIVES OF THIS WORK	57
4	EXPERIMENTAL PART	59
4.1	PROCESSING TECHNIQUES	59
4.1.1	<i>Starting materials</i>	59
4.1.2	<i>Feedstock preparation</i>	63
4.1.3	<i>Shaping by warm pressing</i>	63
4.1.4	<i>Shaping by Metal Injection Moulding</i>	64
4.1.5	<i>Partial debinding</i>	70
4.1.6	<i>Removal of space holder</i>	70
4.1.7	<i>Thermal debinding and sintering</i>	70
4.2	ANALYSIS AND MEASURING METHODS	71
4.2.1	<i>Thermogravimetric Analysis (TGA)</i>	71
4.2.2	<i>Chemical Analysis</i>	73
4.2.3	<i>Density measurements</i>	73
4.2.4	<i>Differential Scanning Calorimetry (DSC)</i>	74
4.2.5	<i>Light Microscopy (LM)</i>	75
4.2.6	<i>Viscosity and torque measurements</i>	76
5	RESULTS	81
5.1	PRELIMINARY 2-C-MIM EXPERIMENTS WITH THE STANDARD BINDER SYSTEM	81
5.1.1	<i>Results of 2-C-insertion-MIM</i>	81
5.1.2	<i>Results of 2-C-sandwich-MIM</i>	83
5.1.3	<i>Discussion of preliminary results</i>	85
5.2	DEVELOPMENT OF A NEW BINDER SYSTEM FOR 2-C-MIM PARTS WITH A GRADIENT IN POROSITY	85

Index

5.2.1	<i>Characterisation of powders and space holder.....</i>	86
5.2.2	<i>Characterisation of binder components and binder systems.....</i>	88
5.2.3	<i>Warm pressing and green density.....</i>	95
5.2.4	<i>Partial debinding.....</i>	97
5.2.5	<i>Desalination.....</i>	102
5.2.6	<i>Sintering.....</i>	103
5.2.7	<i>Microstructure characterisation.....</i>	106
5.2.8	<i>Chemical impurities.....</i>	108
5.2.9	<i>Graded samples by warm pressing.....</i>	110
5.2.10	<i>Feedstock flowing behaviour and choice of preferred binder system.....</i>	111
5.3	OPTIMISATION OF FEEDSTOCK SOLIDS LOADING AND FLOWING BEHAVIOUR USING Fe22Cr POWDER	
	113	
5.3.1	<i>Effect of solids loading.....</i>	113
5.3.2	<i>Effect of stearic acid.....</i>	115
5.3.3	<i>Effect of space holder particles.....</i>	116
5.3.4	<i>Effect of component ratio.....</i>	118
5.3.5	<i>Determination of the optimal solids loading.....</i>	119
5.4	TRANSFER OF OPTIMISED BINDER SYSTEM TO Ti POWDER.....	124
5.4.1	<i>Effect of temperature on selected Ti feedstocks.....</i>	125
5.5	FABRICATION OF A TITANIUM SPINAL IMPLANT WITH GRADIENT IN POROSITY.....	127
5.5.1	<i>2-C-MIM with a fully automated mould.....</i>	127
5.5.2	<i>Characterisation of the implants.....</i>	129
6	SUMMARY AND CONCLUSION.....	135

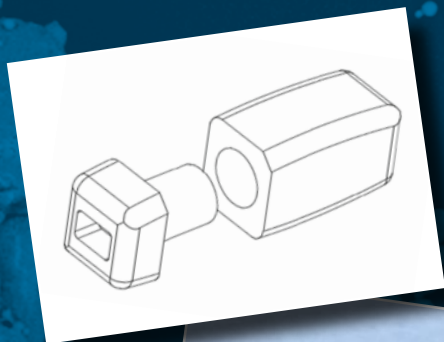

Energie & Umwelt / Energy & Environment
Band / Volume 127
ISBN 978-3-89336-753-5