
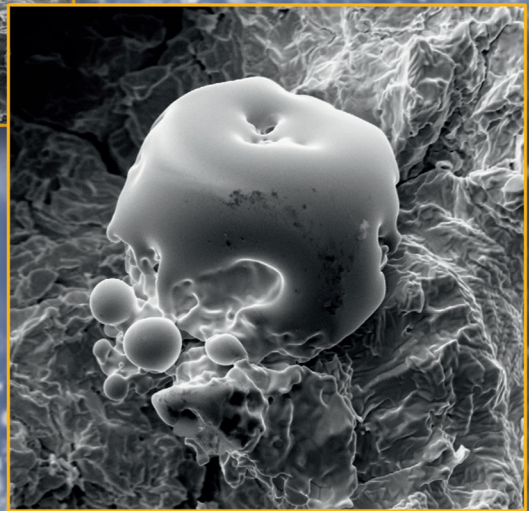


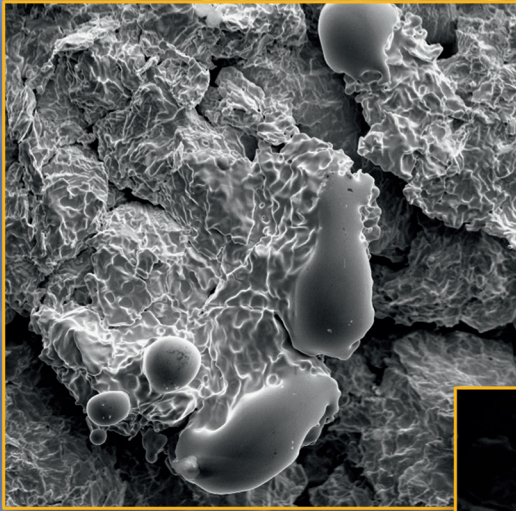

Combined Steady State and High Cycle Transient Heat Load Simulation with the Electron Beam Facility JUDITH 2

Thorsten Werner Loewenhoff

Forschungszentrum Jülich GmbH
Institute of Energy and Climate Research (IEK)
Microstructure and Properties of Materials (IEK-2)

Combined Steady State and High Cycle Transient Heat Load Simulation with the Electron Beam Facility JUDITH 2

Thorsten Werner Loewenhoff

Schriften des Forschungszentrums Jülich
Reihe Energie & Umwelt / Energy & Environment

Band / Volume 173

ISSN 1866-1793

ISBN 978-3-89336-869-3

Contents

List of publications	III
List of symbols and abbreviations	VII
1 Introduction	1
1.1 Nuclear fusion	1
1.2 Plasma facing materials and components	4
1.3 Steady state & transient (heat) loads	8
1.4 Simulating thermal loads outside fusion devices	9
1.5 Thermally induced material damage	10
1.6 Scope of work	13
2 Test facilities and methods	15
2.1 Electron beam test facilities	15
2.1.1 JUDITH 1	15
2.1.2 JUDITH 2	17
2.2 Temperature measurement by pyrometers	18
2.3 Post mortem examination methods	19
2.3.1 Imaging techniques	19
2.3.2 Metallographic analysis	19
2.4 Finite element temperature calculations	20
3 Test procedure development	21
3.1 Mock up design development	21
3.2 Beam profile and guidance	24
3.3 Procedure and results for the first mock up	28
3.4 Circular beam loading method	31

3.5	Improved beam profile measurements	36
3.5.1	Experimental setup	36
3.5.2	Experimental procedure	37
3.5.3	Results	38
3.6	Final test procedure	40
4	Experimental conditions and test matrix	45
4.1	Tested PFMs	45
4.1.1	Tungsten	45
4.1.2	CFC	46
4.2	Experimental conditions	47
4.3	Temperature simulations	50
5	Results and discussion	53
5.1	Temperature measurements and simulation results	53
5.2	Tungsten	60
5.2.1	Overview	60
5.2.2	Roughening	62
5.2.3	Cracking and melting	67
5.2.4	Recrystallisation & Recovery	71
5.3	CFC	73
6	Conclusions	75
	Appendices	79
A	FEM simulation script	81
B	Final mock up design dimensions	91
C	Beam profile measurement results	93
C.1	Results for $p_{\text{chamber}} = 3.5 \cdot 10^{-4}$ mbar	93
C.2	Results for $p_{\text{chamber}} = 2.1 \cdot 10^{-4}$ mbar	96
C.3	Results for $p_{\text{chamber}} = 1.3 \cdot 10^{-4}$ mbar	97
	Bibliography	99



Energie & Umwelt / Energy & Environment
Band / Volume 173
ISBN 978-3-89336-869-3

