


Light induced water splitting using multijunction thin film silicon solar cells

Félix Urbain

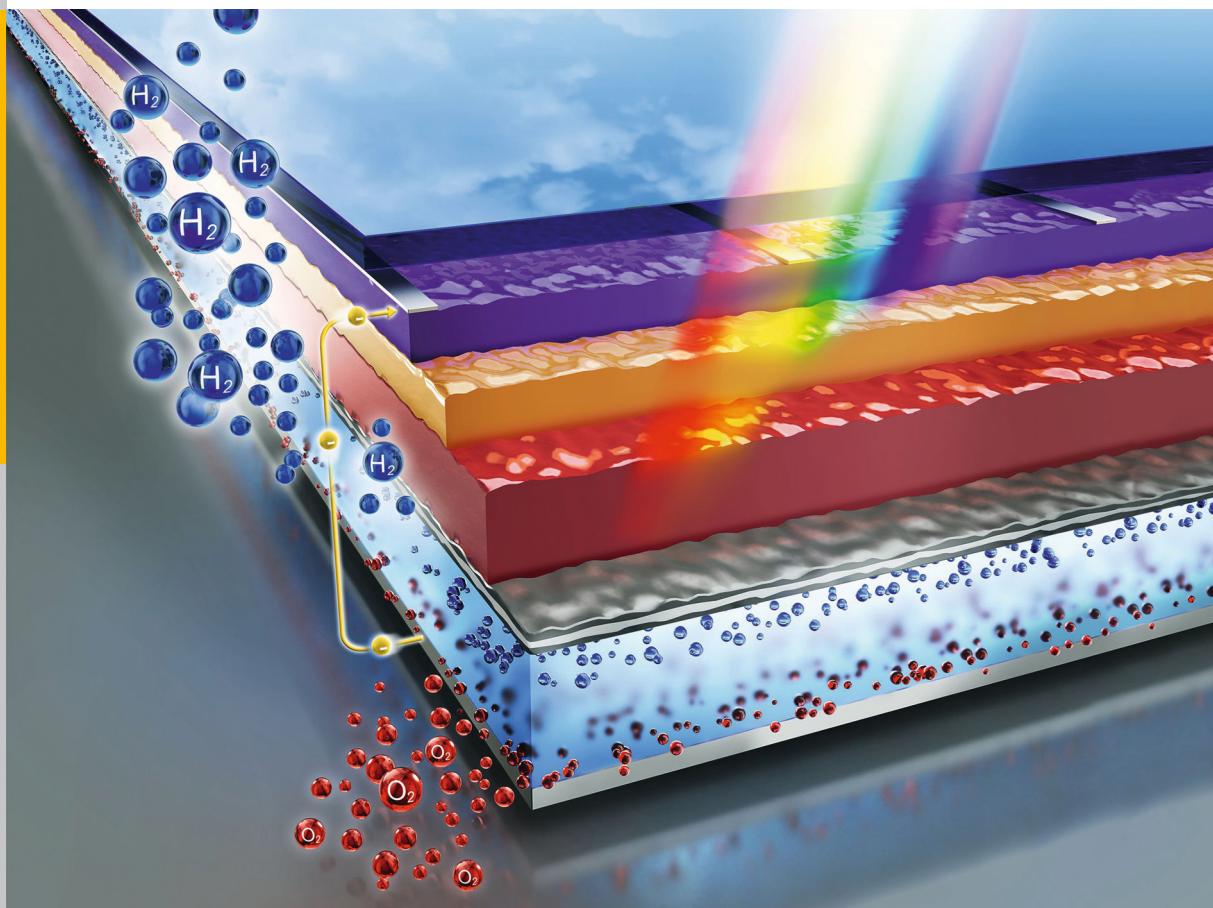

Forschungszentrum Jülich GmbH
Institute of Energy and Climate Research
IEK-5 Photovoltaics

Light induced water splitting using multijunction thin film silicon solar cells

Félix Urbain

Schriften des Forschungszentrums Jülich
Reihe Energie & Umwelt / Energy & Environment

Band / Volume 323

ISSN 1866-1793

ISBN 978-3-95806-148-4

Contents

1	Introduction	1
2	Principles of photoelectrochemical solar energy conversion	7
2.1	Basic concepts of photovoltaics	7
2.1.1	Light absorption in semiconductors	7
2.1.2	Electrons in semiconductors	9
2.1.3	Semiconductor junctions	11
2.1.4	Operation principle of thin film <i>pin</i> solar cells	12
2.2	Basic concepts of electrochemistry	17
2.2.1	Charge transport in electrolytes	17
2.2.2	Fermi level and standard potential of redox systems	17
2.2.3	Electrochemical reaction kinetics	20
2.3	Basic concepts of photoelectrochemical water splitting	23
2.3.1	Principles of solar water splitting	23
2.3.2	Metal/electrolyte interface	23
2.3.3	Semiconductor/electrolyte interface	25
2.3.4	Buried junction devices	29
3	Fundamentals and experimental details of thin film silicon solar cells	33
3.1	Fundamentals of thin film silicon absorber materials	33
3.1.1	Hydrogenated amorphous silicon a-Si:H	33
3.1.2	Hydrogenated microcrystalline silicon μ c-Si:H	37
3.2	Techniques and methods for the preparation of thin film silicon solar cells	39
3.2.1	Plasma enhanced chemical vapor deposition	40
3.2.2	Solar cell preparation	44
3.3	Characterisation of thin film silicon absorber layers	45
3.4	Characterisation of solar cells	47
3.4.1	Photovoltaic parameters	47
3.4.2	Quantum efficiency	49
4	Characterisation and modeling of photovoltaic-electrochemical devices	53
4.1	Overview on photovoltaic-electrochemical devices	53
4.2	Photoelectrochemical measurements	55
4.2.1	Measurement setup	55

4.2.2	Electrochemical methods	56
4.3	Device modeling	60
4.3.1	Series circuit model	61
4.3.2	Input parameters	62
4.4	Solar-to-Hydrogen efficiency calculation	67
5	High voltage multijunction thin film silicon solar cells	71
5.1	Experimental details	71
5.2	a-Si:H absorber layer properties and a-Si:H single junction solar cells	72
5.2.1	Intrinsic a-Si:H absorber layers	73
5.2.2	a-Si:H single junction solar cells	74
5.3	μ c-Si:H absorber layer properties and μ c-Si:H single junction solar cells	77
5.3.1	Intrinsic μ c-Si:H absorber layers	78
5.3.2	μ c-Si:H single junction solar cells	78
5.4	Tandem junction solar cells	87
5.4.1	a-Si:H/ μ c-Si:H tandem junction solar cells	87
5.4.2	a-Si:H/a-Si:H tandem junction solar cells	91
5.5	Triple and quadruple junction solar cells	93
5.5.1	a-Si:H/ μ c-Si:H/ μ c-Si:H	94
5.5.2	a-Si:H/a-Si:H/ μ c-Si:H	96
5.5.3	a-Si:H/a-Si:H/ μ c-Si:H/ μ c-Si:H	98
5.6	Light induced degradation	100
5.7	Temperature-dependent photovoltaic performance	104
5.8	Summary and conclusions	106
6	Thin film silicon based photovoltaic-electrochemical devices	113
6.1	Photocathode/electrolyte contact	113
6.1.1	Catalytic and optical properties of single metal layer contacts	114
6.1.2	Metal stacks as photocathode contact	116
6.2	Multijunction based PV-EC devices	121
6.2.1	Influence of the catalyst	123
6.2.2	Influence of the electrolyte	124
6.2.3	Influence of light induced degradation	127
6.3	Device analysis by modeling	129
6.3.1	Modeling of the current-voltage characteristics	130
6.3.2	Temperature-dependent photoelectrochemical performance	136
6.4	Summary and conclusions	142
7	Conclusion and future prospects	147

Bibliography	153
Appendix	I
Glossary	VII
List of Publications	XIII
Curriculum vitae	XIX
Acknowledgments	XXI
List of Figures	XL
List of Tables	XLIV

**Energie & Umwelt /
Energy & Environment
Band / Volume 323
ISBN 978-3-95806-148-4**

