


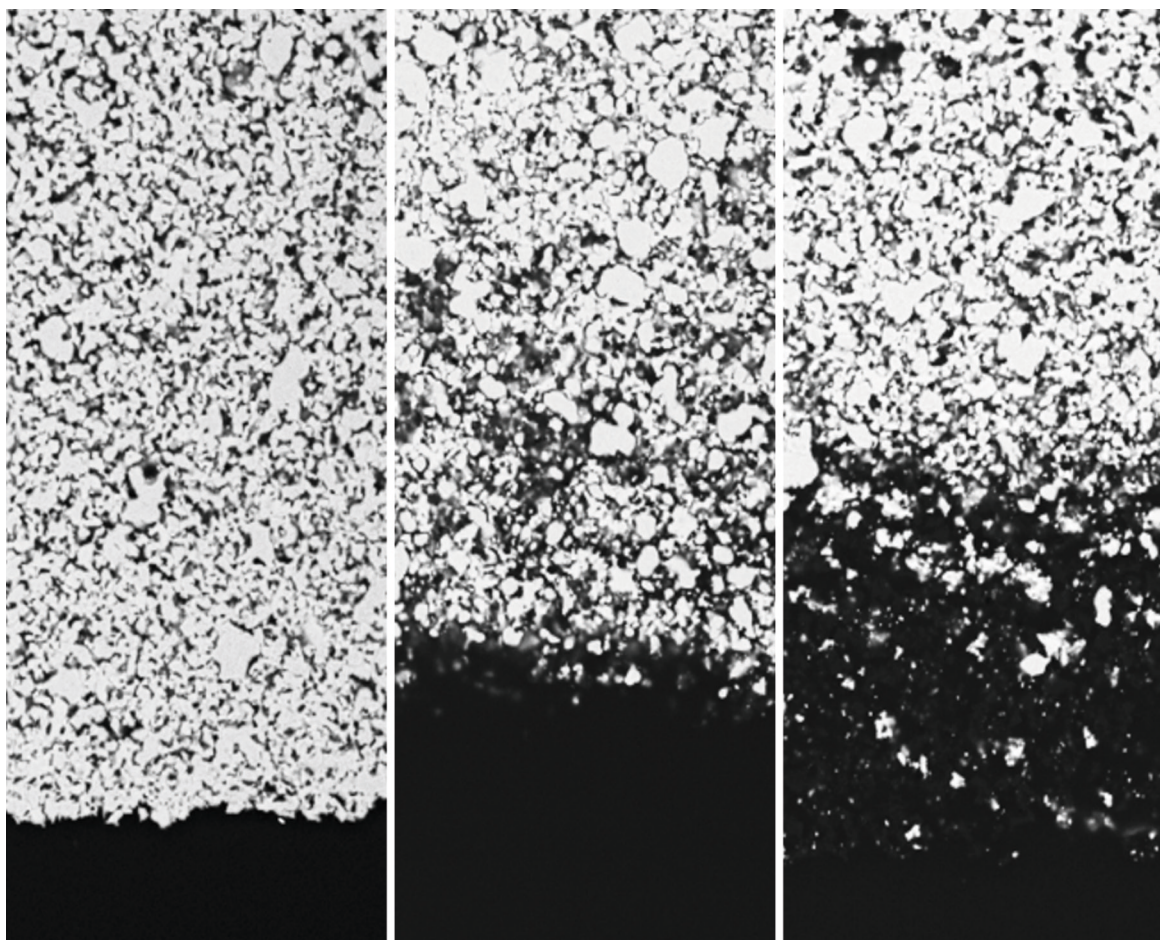

Coupling a Solid Oxide Fuel Cell with a Biomass Gasifier: Degradation Mechanisms and Alternative Anode Materials

Hyeondeok Jeong

Energie & Umwelt / Energy & Environment

Band / Volume 460

ISBN 978-3-95806-398-3

Forschungszentrum Jülich GmbH
Institut für Energie- und Klimaforschung
Werkstoffsynthese und Herstellungsverfahren (IEK-1)

Coupling a Solid Oxide Fuel Cell with a Biomass Gasifier: Degradation Mechanisms and Alternative Anode Materials

Hyeondeok Jeong

Schriften des Forschungszentrums Jülich
Reihe Energie & Umwelt / Energy & Environment

Band / Volume 460

ISSN 1866-1793

ISBN 978-3-95806-398-3

Content

1. Introduction.....	- 1 -
1.1. Energy crisis and alternative energy source	- 1 -
1.2. SOFC and bio-syngas application.....	- 1 -
1.3. Aims of this work and outline.....	- 2 -
2. Fundamental background.....	- 3 -
2.1. Solid oxide fuel cells	- 3 -
2.1.1. Working principles and history of fuel cells	- 3 -
2.1.2. Properties and advantages of solid oxide fuel cells (SOFCs)	- 4 -
2.1.3. SOFC materials	- 7 -
2.1.4. SOFC design	- 11 -
2.2. Bio-syngas	- 12 -
2.2.1. Biomass gasification.....	- 12 -
2.2.2. Gas composition of bio-syngas	- 13 -
2.2.3. Impurities in bio-syngas.....	- 15 -
2.3. Degradation of SOFC.....	- 15 -
2.3.1. General degradation phenomena of SOFCs.....	- 15 -
2.3.2. Carbon related degradation	- 16 -
2.3.3. Sulfur poisoning	- 18 -
2.4. Alternative anode materials	- 20 -
2.4.1. Ni-YSZ with incorporation of other materials	- 20 -
2.4.2. Cermet anode	- 21 -
2.4.3. Mixed ionic and electronic conductors (MIEC).....	- 24 -
3. Experimental	- 25 -
3.1. Cell manufacturing.....	- 25 -
3.1.1. Standard cell.....	- 25 -
3.1.2. Cells with a Ni/GDC anode	- 27 -
3.1.3. Cells with Mo incorporation into the anode.....	- 27 -
3.2. Cell test.....	- 29 -
3.2.1. Single cell measurements at Karlsruhe Institute of Technology (KIT)	- 29 -
3.2.2. Long-term test with bio-syngas (TU Munich)	- 30 -
3.2.3. Stack test with biomass gasifier (TU Munich).....	- 30 -
3.3. Characterization of precursor materials and cells after manufacturing	- 32 -

3.3.1.	DTA-TG analysis	- 32 -
3.3.2.	Electrolyte leakage test	- 32 -
3.3.3.	X-ray diffraction (XRD)	- 32 -
3.3.4.	Conductivity measurement	- 33 -
3.4.	Post-test analysis of cells after poisoning test	- 33 -
3.4.1.	An introduction of post-test analysis of cells after test	- 33 -
3.4.2.	Scanning electron microscope (SEM)	- 35 -
3.4.3.	Raman spectra	- 35 -
4.	Degradation of standard cells with impurities containing syngas	- 36 -
4.1.	Single cell test with impurities containing simulated syngas	- 36 -
4.1.1.	The cell microstructure before test	- 36 -
4.1.2.	Effect of phenol	- 37 -
4.1.3.	Effect of naphthalene	- 45 -
4.1.4.	Effect of H ₂ S	- 48 -
4.2.	Stack test with real bio-syngas*	- 52 -
4.3.	Discussion of Ni/YSZ anode cell degradation	- 60 -
5.	Cell with alternative anodes	- 64 -
5.1.	Ni/GDC anode cell	- 64 -
5.1.1.	Ni/GDC anode cell development	- 64 -
5.1.2.	YSZ-GDC inter-diffusion	- 67 -
5.1.3.	Ni/GDC cell test result (KIT)	- 74 -
5.1.4.	Discussion of the Ni/GDC anode cell test results	- 79 -
5.2.	Anode material with Mo incorporation	- 81 -
5.2.1.	ASC type cell development	- 81 -
5.2.2.	ESC development and outlook of the Mo-containing anode	- 90 -
5.2.3.	Discussion of Mo incorporation into the anode	- 93 -
6.	Conclusion	- 94 -
7.	Reference	- 95 -

Energie & Umwelt / Energy & Environment
Band / Volume 460
ISBN 978-3-95806-398-3