


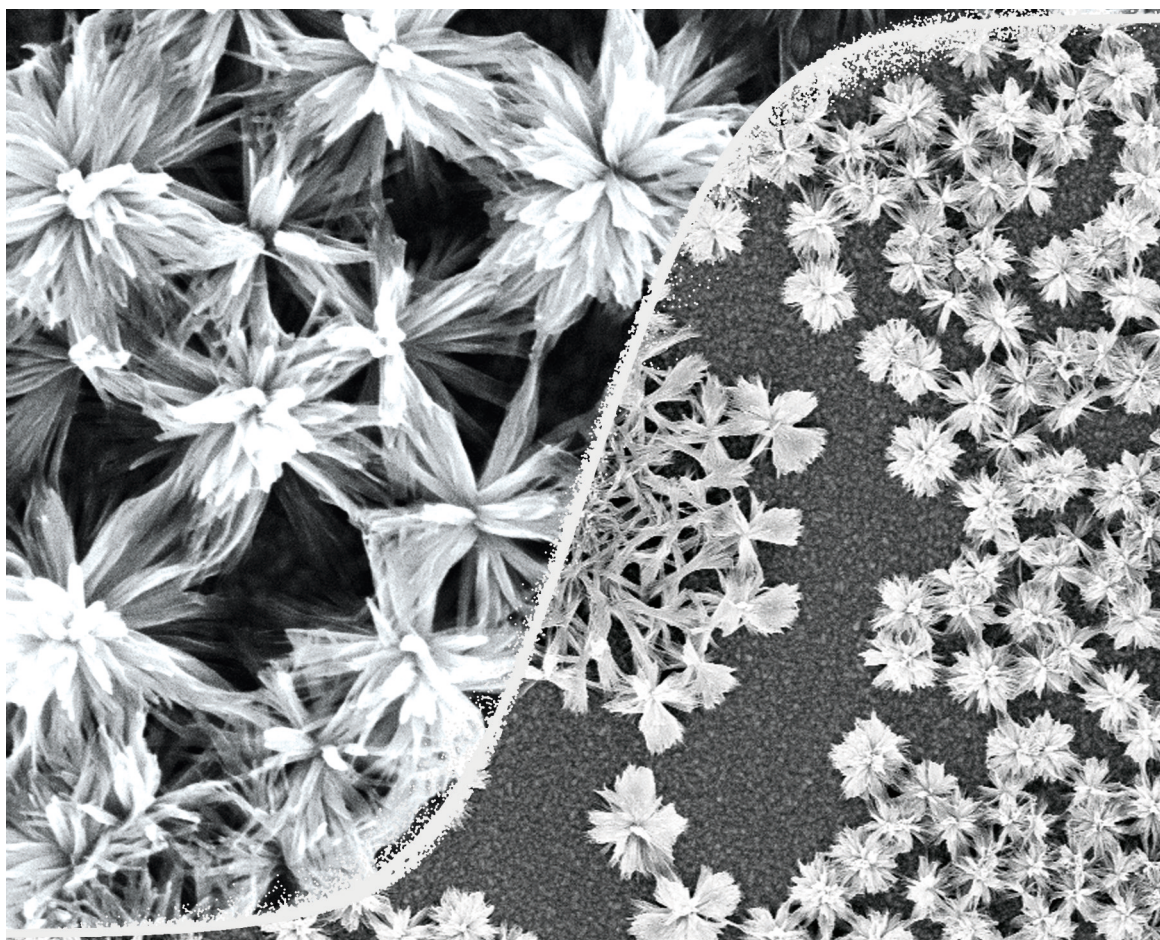

Quantifying the Impact of Inhomogeneity, Transport and Recombination in Emerging Thin-Film Solar Cells

Pascal Kaienburg

Energie & Umwelt / Energy & Environment

Band / Volume 481

ISBN 978-3-95806-440-9

Mitglied der Helmholtz-Gemeinschaft

Forschungszentrum Jülich GmbH
Institut für Energie- und Klimaforschung
IEK-5 Photovoltaik

Quantifying the Impact of Inhomogeneity, Transport and Recombination in Emerging Thin-Film Solar Cells

Pascal Kaienburg

Schriften des Forschungszentrums Jülich
Reihe Energie & Umwelt / Energy & Environment

Band / Volume 481

ISSN 1866-1793

ISBN 978-3-95806-440-9

Contents

Abstract	1
Zusammenfassung	3
1. Introduction	5
2. Background	11
2.1. Key Characteristics of Solar Cells	11
2.2. Emerging Solar Cell Absorbers	13
2.2.1. Requirements for Bulk Absorbers	13
2.2.2. Limits and Progress	15
2.2.3. The Case of Sb_2S_3	19
2.3. Thin-Film Solar Cells	20
2.3.1. Working Principle of p - i - n Solar Cells	22
2.3.2. Design Concept of Thin-Film Solar Cells	27
2.3.3. Inhomogeneity in Thin-Film Solar Cells	31
2.3.4. Fill Factor and Charge Collection	33
2.4. Focus Technologies	39
2.4.1. Organic Solar Cells	40
2.4.2. Sb_2S_3 Solar Cells	45
3. Methods	49
3.1. Drift-diffusion Simulations	49
3.1.1. Mathematical Problem Description	50
3.1.2. Generation and Recombination Models	53
3.1.3. Physical Remarks	55
3.2. Fabrication	57
3.2.1. Solar Cell Stack	57
3.2.2. Sb_2S_3 Layers	58
3.2.3. Solar Cells	60
3.2.4. Processing Conditions and Equipment	62

Contents

3.3. Characterization	64
3.3.1. Material and Layer Characterization	64
3.3.2. Solar Cell Characterization	70
4. Pinholes and Non-linear Shunts in Thin-Film Solar Cells	75
4.1. Qualitative Phenomenon	76
4.2. Methodology	79
4.3. Prediction of Pinhole Impact	82
4.4. Comparison of Devices with and without Absorber	87
4.5. Discussion	89
4.6. Chapter conclusion	91
5. Charge Collection in Thin-Film Solar Cells	93
5.1. Fill Factor and Electronic Quality	94
5.1.1. Method	96
5.1.2. Analytical Estimates	99
5.1.3. Optimized FF Model	101
5.1.4. Electronic Quality Factor and Model Precision	105
5.1.5. Contacts	107
5.1.6. Space-charge Region	111
5.1.7. Transfer to Inorganic Absorbers	116
5.2. Figures of Merit for the Efficiency	119
5.2.1. Method	121
5.2.2. The $(\alpha\mu\tau)$ -Product	121
5.3. Application to Organic Solar Cells	126
5.3.1. History of OSC Development	126
5.3.2. NFAs with Tunable Absorption Bands	130
5.3.3. Enhanced Absorption in OSCs	136
5.3.4. Relation between FOMs	139
5.4. Chapter Conclusion	140
6. Sb_2S_3 Solar Cells	143
6.1. Layer and Device Optimization	144
6.1.1. Annealing Procedure	144

6.1.2. Stoichiometry and Energy Levels	150
6.1.3. Sb ₂ S ₃ /HTM Heterojunction	154
6.1.4. Optimized Devices	155
6.1.5. Summary and Literature Comparison	159
6.2. Limiting Factors	160
6.2.1. Performance Evaluation	160
6.2.2. Impact of Pinholes	162
6.2.3. Open-Circuit Voltage Losses	164
6.2.4. Defect Density of States	166
6.2.5. Charge Carrier Collection	170
6.3. Chapter Summary and outlook	174
7. Conclusion and Outlook	179
Bibliography	182
A. Evaluation of Absorber Materials	220
A.1. Determine the Band Gap Energy	220
A.2. Calculate the Shockley-Queisser Limit	221
A.3. Calculate (Non-)Radiative Voltage Losses	222
A.4. Calculate the Scharber Efficiency	223
A.5. Relations between Photocurrent and Open-Circuit Voltage Loss . . .	226
A.6. Organic Solar Cell Development Captured by Two FOMs	228
B. Literature Data	229
C. Charge Collection	233
D. Sb₂S₃	241
E. Recipes	247
F. Glossary	250
Acknowledgements	255
List of Journal Publications	258

Energie & Umwelt / Energy & Environment
Band / Volume 481
ISBN 978-3-95806-440-9