


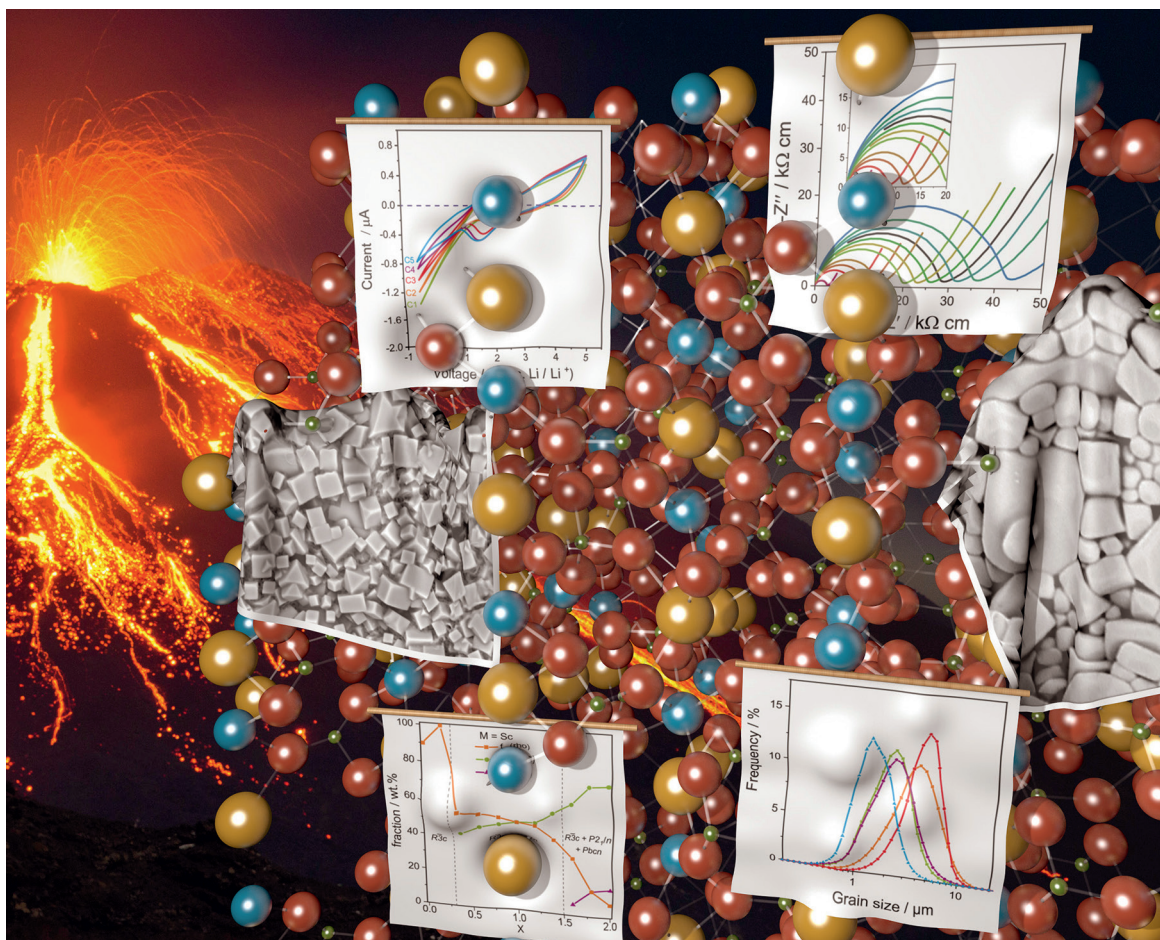

Optimization of NaSICON-type lithium- ion conductors for solid-state batteries

Asmaa Loutati

Energie & Umwelt / Energy & Environment

Band / Volume 664

ISBN 978-3-95806-824-7

Forschungszentrum Jülich GmbH
Institute of Energy Materials and Devices (IMD)
Werkstoffsynthese und Herstellungsverfahren (IMD-2)

Optimization of NaSICON-type lithium- ion conductors for solid-state batteries

Asmaa Loutati

Schriften des Forschungszentrums Jülich
Reihe Energie & Umwelt / Energy & Environment

Band / Volume 664

ISSN 1866-1793

ISBN 978-3-95806-824-7

Table of Contents

Abstract.....	iii
Kurzfassung.....	v
 I Introduction.....	 1
1.1 Motivation: electrochemical energy storage.....	1
1.2 Overview of solid electrolytes.....	2
1.2.1 Oxide electrolytes.....	5
1.2.1.1 Lithium Superionic Conductor (LiSICON)	6
1.2.1.2 Na ⁺ Superionic Conductor (NaSICON)	6
1.2.2 Variety of NaSICON-type solid electrolytes.....	7
1.3 Objective of this thesis.....	9
1.3.1 Partial cation substitutions.....	10
1.3.2 Polyanion partial substitutions.....	11
 II Materials and Methods.....	 13
2.1 Material Synthesis.....	13
2.1.1 Powder Synthesis.....	13
2.1.2 Milling.....	13
2.1.3 Sintering.....	13
2.1.3.1 Free sintering.....	13
2.1.3.2 Field-Assisted Sintering Technology/Spark Plasma Sintering (FAST/SPS).....	13
2.2 Powder characterization.....	14
2.2.1 Elemental analysis.....	14
2.2.2 Particle size distribution.....	14
2.3 Thermal analysis.....	15
2.3.1 DTA/TG.....	15
2.3.2 Dilatometry.....	15
2.3.3 Relative density.....	15
2.4 Crystal structure.....	16
2.4.1 X-ray diffraction.....	16
2.4.2 Rietveld refinement.....	17
2.5 Electrochemical characterization.....	18
2.5.1 Electrochemical Impedance Spectroscopy.....	18
2.5.2 Cyclic voltammetry.....	21
2.6 Scanning electron microscopy.....	22
2.7 Energy dispersive X-ray analysis.....	22
2.8 X-ray photoelectron spectroscopy.....	23

III Solid-state Li^+ ion conductors in the system $\text{Li}_2\text{O}-\text{M}_2\text{O}_3-\text{ZrO}_2-\text{SiO}_2-\text{P}_2\text{O}_5$ Partial cation substitutions in $\text{Li}_{1+x}\text{M}_x\text{Zr}_{2-x}\text{P}_3\text{O}_{12}$ with $\text{M} = \text{Sc}, \text{Y}, \text{Al}$	25
3.1 Scandium substitutions: $\text{Li}_{1+x}\text{Sc}_x\text{Zr}_{2-x}(\text{PO}_4)_3$ ($0 \leq x \leq 2$)	25
3.2 Yttrium substitutions: $\text{Li}_{1+x}\text{Y}_x\text{Zr}_{2-x}(\text{PO}_4)_3$ ($0 \leq x \leq 2$)	32
3.3 Aluminum substitutions: $\text{Li}_{1+x}\text{Al}_x\text{Zr}_{2-x}(\text{PO}_4)_3$ ($0 \leq x \leq 1$)	36
3.4 Optimizing the sintering conditions of $\text{Li}_{1.2}\text{M}_{0.2}\text{Zr}_{1.8}(\text{PO}_4)_3$ ($\text{M} = \text{Sc}, \text{Y}, \text{Al}$).....	40
3.4.1 Two-step sintering.....	40
3.4.2 FAST/SPS.....	42
3.4.3 Discussion of the substitution-dependent chemistry.....	44
IV Solid-state Li^+ ion conductors in the system $\text{Li}_2\text{O}-\text{M}_2\text{O}_3-\text{ZrO}_2-\text{SiO}_2-\text{P}_2\text{O}_5$ Partial polyanion substitutions in $\text{Li}_{3+x}\text{Sc}_2\text{Si}_x\text{P}_{3-x}\text{O}_{12}$ ($0 \leq x \leq 0.6$) and $\text{Li}_{1.2+x}\text{Sc}_{0.2}\text{Zr}_{1.8}\text{Si}_x\text{P}_{3-x}\text{O}_{12}$ ($0.3 \leq x \leq 2.8$)	49
4.1 $\text{Li}_{3+x}\text{Sc}_2\text{Si}_x\text{P}_{3-x}\text{O}_{12}$ ($0 \leq x \leq 0.6$)	49
4.2 $\text{Li}_{1.2+x}\text{Sc}_{0.2}\text{Zr}_{1.8}\text{Si}_x\text{P}_{3-x}\text{O}_{12}$ ($0 \leq x \leq 2.8$)	59
V Stability.....	69
5.1 Electrochemical stability window.....	69
5.1.1 Characterization of electrochemical stability window using cyclic voltammetry...69	
5.1.2 Characterization of the black surface layer on $\text{Li}_{1.2}\text{Y}_{0.2}\text{Zr}_{1.8}(\text{PO}_4)_3$ after cycling...73	
VI Conclusion.....	75
Annexes.....	77
List of Publications.....	83
List of Tables.....	95
List of Figures.....	97
List of Abbreviations	101
Acknowledgements.....	103

Energie & Umwelt / Energy & Environment
Band / Volume 664
ISBN 978-3-95806-824-7